

### 13 oz. Frosty Clear


Frosty Clear

VCLR0001 - 72" / VCLR0002 - 96"


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	13 oz./sq. yd.	440.8 gsm
Adhesion	ASTM D751 (Free Peel)	N/A	N/A
Breaking Strength	ASTM D5034	W 220 F 200	W 978 F 890
Tear Strength	ASTM 2261	W 106 F 110	W 472 F 489
Hydrostatic Burst	ASTM D751/A	300	1334

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	○ Round
Weave (Threads per Inch)	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	1000
	Fill	1000
PVC Treatment	Flame Resistance	NO
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	YES
Embossing (Surface Texture)	Matte	-
	Taffeta	-
	Polish	✓

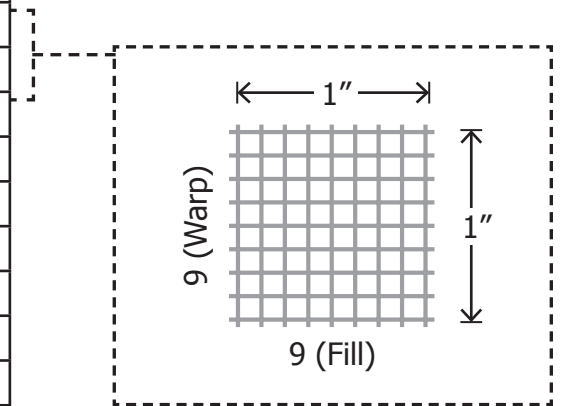

Layers		
PVC Film	①	Frosty Clear
Scrim	②	Round Stitch
PVC Film	③	Frosty Clear

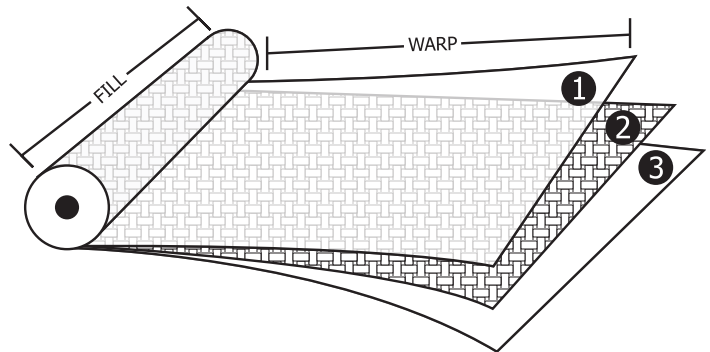

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.