

16 oz. Crystal Clear


Crystal Clear

VCLR0501 - 72" / VCLR0502 - 96"


| Physical Properties | Test Method | English | Metric |
|---------------------|-----------------------|----------------|--------------|
| Weight | ASTM D3776 | 16 oz./sq. yd. | 542.5 gsm |
| Adhesion | ASTM D751 (Free Peel) | N/A | N/A |
| Breaking Strength | ASTM D5034 | W 240 F 217 | W 1068 F 965 |
| Tear Strength | ASTM 2261 | W 120 F 134 | W 534 F 596 |
| Hydrostatic Burst | ASTM D751/A | 300 | 1334 |
| Cold Crack | ASTM D2136 | WAITING | |

W = Warp / F = Fill

| Construction | | |
|--------------------------|------------------|-----------|
| Thread Type | Material | Polyester |
| | Stitch Type | ○ Round |
| Weave (Threads per Inch) | Warp | 9 |
| | Fill | 9 |
| Denier (Thread Weight) | Warp | 1000 |
| | Fill | 1000 |
| PVC Treatment | Flame Resistance | NO |
| | Antimicrobial | YES |
| | Antistatic | NO |
| | Ultraviolet | YES |

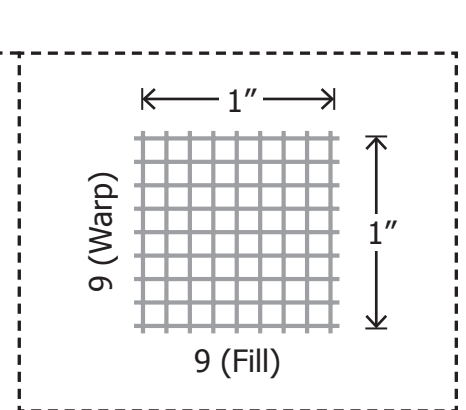

| Layers | | |
|----------|---|---------------|
| PVC Film | ① | Crystal Clear |
| Scrim | ② | Round Stitch |
| PVC Film | ③ | Crystal Clear |

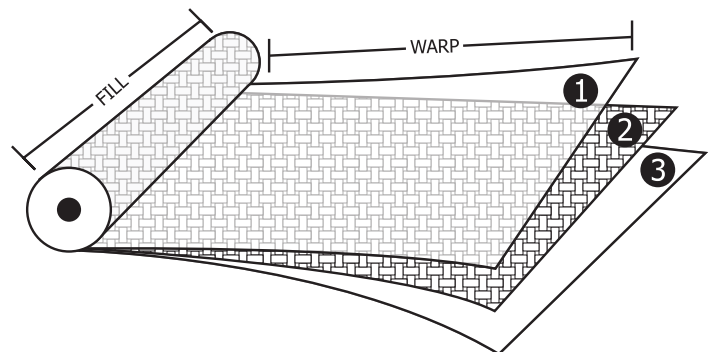

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.