


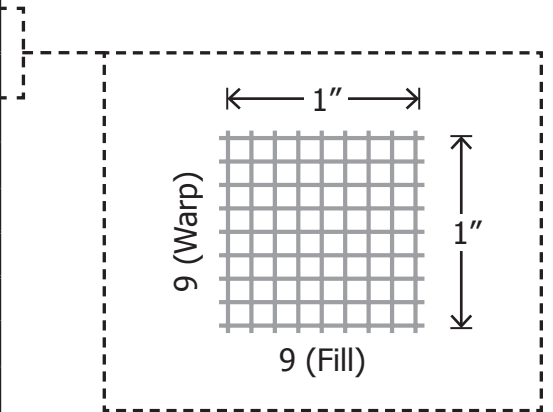
AutoTex 13

AT10003 - 62" // AT10004 - 72" // Frosty Clear


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	12 oz./sq. yard	407 gsm
Adhesion	ASTM D751 (Free Peel)	6 lbs min.	27 N min.
Breaking Strength	ASTM D5034	W 222 F 203	W 987 F 903
Tear Strength	ASTM 2261	W 108 F 112	W 480 F 498
Hydrostatic Burst	ASTM D751/A	370	1646

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	1000
	Fill	1000
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	✓
	Taffeta	-
	Polish	-



Layers		
PVC Film	①	Frosty Clear
Scrim	②	Flat Stitch
PVC Film	③	Frosty Clear

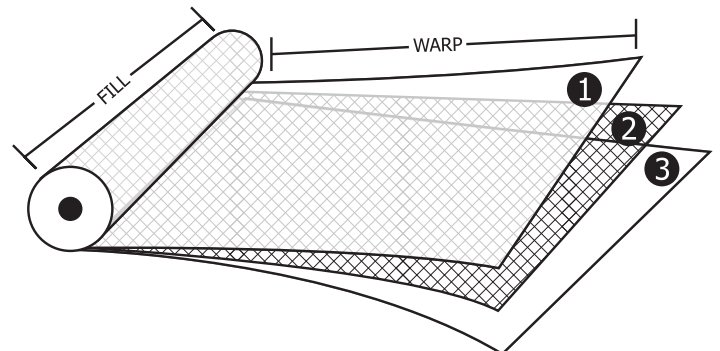

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.