


### AutoTex 18

V610W157DS // White Grey


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	18 oz./sq. yard	532 gsm
Adhesion	ASTM D751 (Free Peel)	18 lb	80 N
Breaking Strength	ASTM D5034	W 250 F 230	W 1112 F 1023
Tear Strength	ASTM 2261	W 62 F 38	W 276 F 169
Hydrostatic Burst	ASTM D751/A		

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	○ Round
Weave	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	1000
	Fill	1000
PVC Treatment	Flame Resistance	YES
	Antimicrobial	NO
	Antistatic	YES
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	✓
	Taffeta	-
	Polish	-

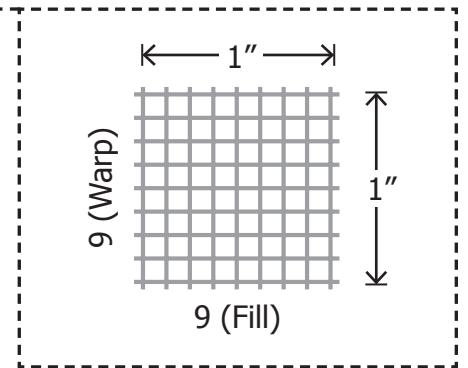

Layers		
PVC	①	White
Scrim	②	Round Stitch
PV	③	Grey

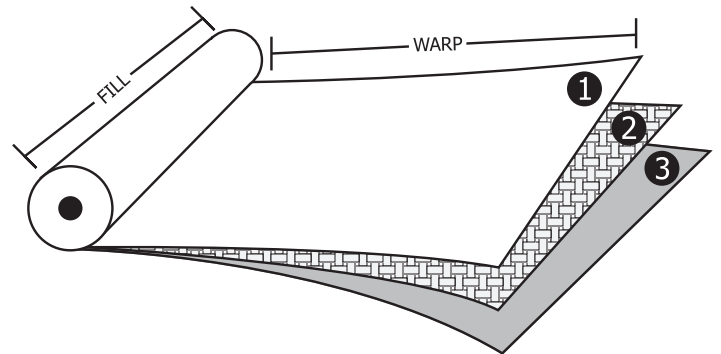

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.