


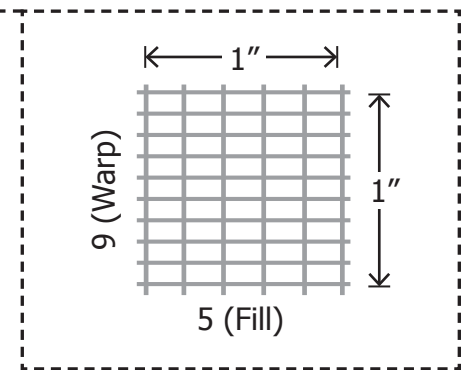
AutoTex BT1 - KRC

AT10008 // Blue Brushed Tricot/Frosty Clear Film


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	10oz./sq. yard	339 gsm
Adhesion	ASTM D751 (Free Peel)	3 lbs	13 N
Breaking Strength	ASTM D5034	W 285 F 145	W 1268 F 645
Tear Strength	ASTM 2261	W 75 F 45	W 334 F 200
Puncture Resistance	ASTM D751	56 lbs	250 N

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	5
Denier (Thread Weight)	Warp	500
	Fill	1000
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	✓
	Taffeta	-
	Polish	-



Layers		
PVC Film	①	Frosty Clear
Scrim	②	Flat Stitch
Brushed Tricot	③	3 oz. Brushed Tricot

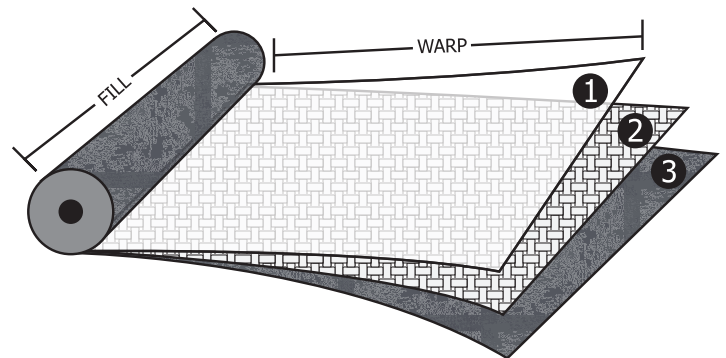

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.