


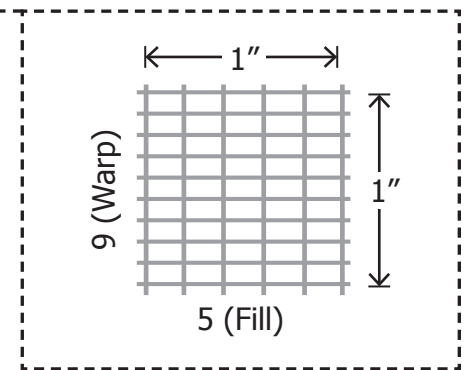
### AutoTex BT2 - KRK

AT10009 // Blue Brushed Tricot/Frosty Clear Film


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	14oz./sq. yard	475 gsm
Adhesion	ASTM D751 (Free Peel)	4 lbs	18 N
Breaking Strength	ASTM D5034	W 345 F 175	W 1535 F 778
Tear Strength	ASTM 2261	W 85 F 50	W 378 F 222
Puncture Resistance	ASTM D751	91 lbs	405 N

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	5
Denier (Thread Weight)	Warp	500
	Fill	1000
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	-
	Taffeta	-
	Polish	-



Layers		
Brushed Tricot	①	3 oz. Brushed Tricot
PVC Film	②	Frosty Clear
Polyester	③	Flat Stitch
Brushed Tricot	④	3 oz. Brushed Tricot

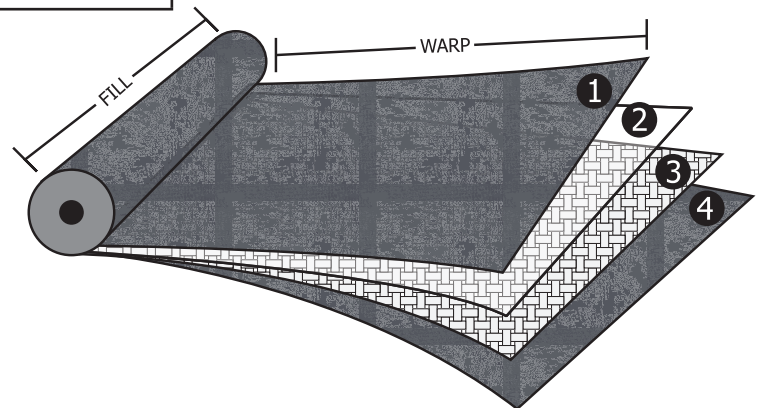

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.