


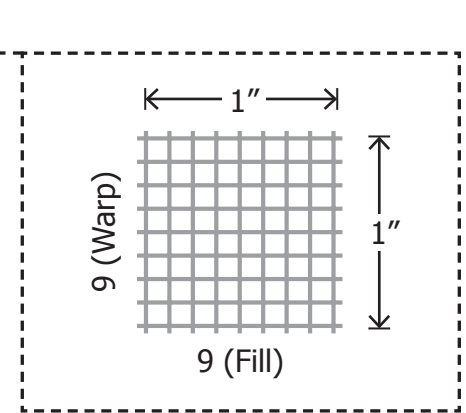
AutoTex DS

AT10006 // Blue Brushed Tricot/Blue Brushed Tricot


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	17 oz./sq. yd.	503 gsm
Adhesion	ASTM D751 (Free Peel)	4 lbs	17.8 N
Breaking Strength	ASTM D5034	W 220 F 160	W 978 F 712
Tear Strength	ASTM 2261	W 60 F 50	W 267 F 222
Hydrostatic Burst	ASTM D751/A	370	2551

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	450
	Fill	400
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	-
	Taffeta	-
	Polish	-



Layers		
Brushed Tricot	①	3 oz. Brushed Tricot
PVC Film	②	Frosty Clear
Scrim	③	Flat Stitch
PVC Film	④	Frosty Clear
Brushed Tricot	⑤	3 oz. Brushed Tricot

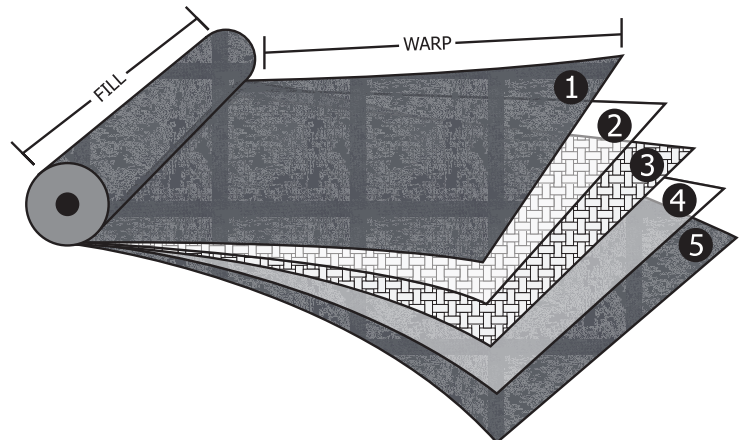

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.