


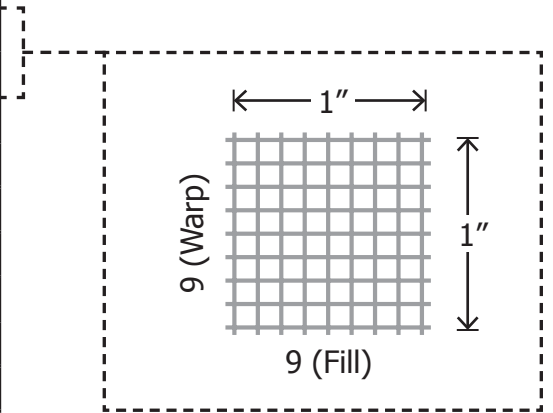
AutoTex HLV

AT10007 // Frosty Clear/Blue Brushed Tricot with foam


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	11 oz./sq. yard	325 gsm
Adhesion	ASTM D751 (Free Peel)	1.4 lbs min.	6.7 N min.
Breaking Strength	ASTM D5034	W 185 F 115	W 823 F 512
Tear Strength	ASTM 2261	W 40 F 45	W 178 F 200
Hydrostatic Burst	ASTM D751/A	N/A	N/A

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	1000
	Fill	1000
PVC Treatment	Flame Resistance	NO
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	✓
	Taffeta	-
	Polish	-



Layers		
Brushed Tricot	①	3 oz. Brushed Tricot
Foam	②	1/8" Non-Clickable Polyester (S11)
Polyester	③	Flat Stitch
PVC Film	④	Frosty Clear

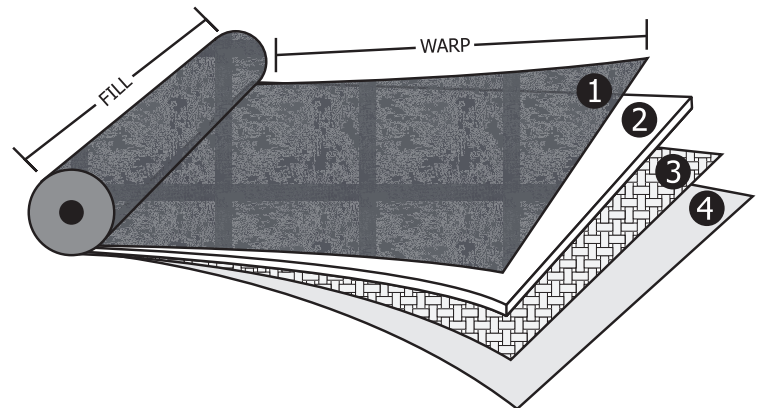

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.