


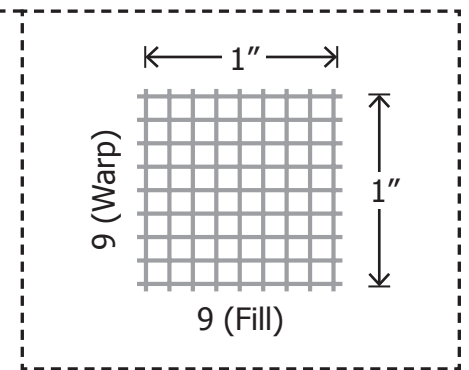
### AutoTex SS

AT10005 // Blue Brushed Tricot/Frosty Clear Vinyl


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	11 oz./sq. yard	325 gsm
Adhesion	ASTM D751 (Free Peel)	5.3 lbs (Tricot) 10.5 lbs (vinyl)	23.5 N (Tricot) 46.7 N (vinyl)
Breaking Strength	ASTM D5034	W 218 F 145	W 970 F 645
Tear Strength	ASTM 2261	W 32 F 43	W 142 F 191
Hydrostatic Burst	ASTM D751/A	300 (vinyl side)	2068

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave (Threads per Inch)	Warp	9
	Fill	9
Denier (Thread Weight)	Warp	450
	Fill	400
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	✓
	Taffeta	-
	Polish	-



Layers		
PVC Film	①	Frosty Clear or Grey
Scrim	②	Flat Stitch
Brushed Tricot	③	3 oz. Brushed Tricot

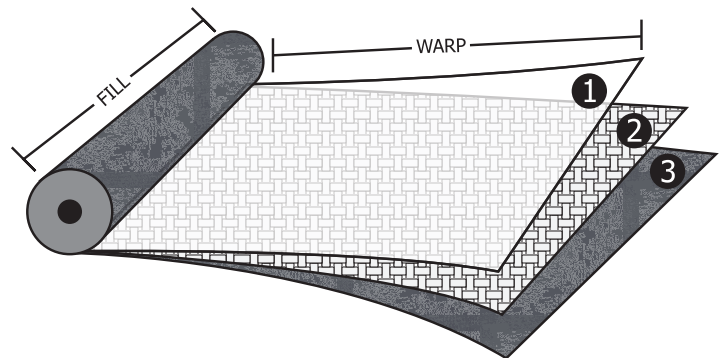

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.