


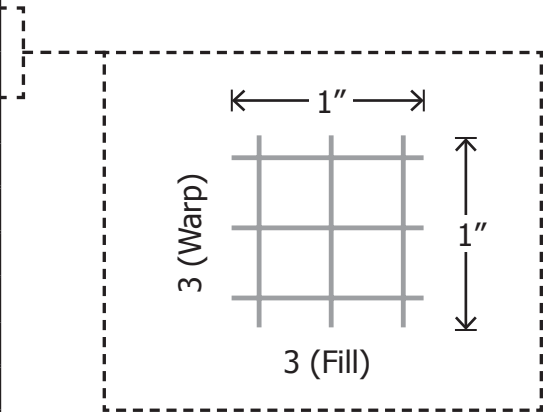
### AutoTex Water Clear 13

AT10002 // Double Polished Clear


Physical Properties	Test Method	English	Metric
Weight	ASTM D3776	13 oz./sq. yard	384 gsm
Adhesion	ASTM D751 (Free Peel)	10 lbs min.	44 N min.
Breaking Strength	ASTM D5034	W 65 F 65	W 289 F 289
Tear Strength	ASTM 2261	W34 W 34	W 151 F 151
Hydrostatic Burst	ASTM D751/A	324	2234

W = Warp / F = Fill

Construction		
Thread Type	Material	Polyester
	Stitch Type	 Flat
Weave	Warp	3
	Fill	3
Denier (Thread Weight)	Warp	1000
	Fill	1000
PVC Treatment	Flame Resistance	YES
	Antimicrobial	YES
	Antistatic	NO
	Ultraviolet	NO
Embossing (Surface Texture)	Matte	-
	Taffeta	-
	Polish	✓



Layers		
PVC Film	①	Double Polished Clear
Scrim	②	Flat Stitch
PVC Film	③	Double Polished Clear

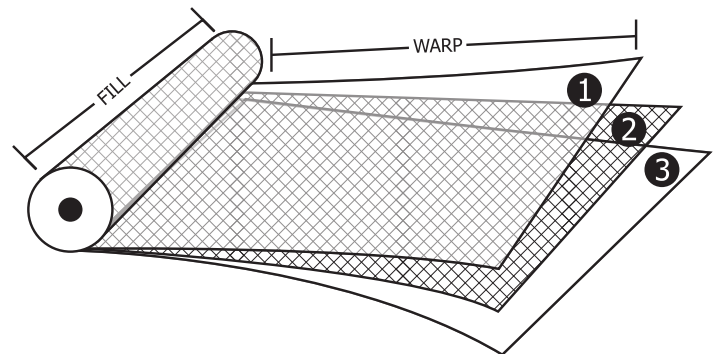

The information provided is reputed to be accurate and is intended for use as a general guide. Celina makes no guarantee or prediction of results and assumes no responsibility in connection with the possible use of this information.